

**City of Hernando, MS
AWG Infrastructure Improvements
Pickering Firm, Inc. Project 25971.00**

Plans, Specifications, and Contract Documents

TO: ALL PLANHOLDERS

FROM: Jonathan McLeod, PE

DATE: Monday, 24 May 2021

The Plans, Specifications, and Contract Documents for this Project shall be amended as follows:

ADDENDUM #1

1. Contract Time

The contract time has changed. The Contract Time is increased to **180** calendar days.

2. CAP loan Guidelines – Project Sign

Contractor shall furnish and install a 4' x 8' project sign, to be maintained and updated, until project closeout. All information shall be verified with the City of Hernando, MS.

See attached template for sign requirements.

3. What are the required concrete dimensions for the wet well?

Wet well components shall be of precast concrete construction including 96" diameter riser sections, top slab, and base section.

-Top slab shall be 9" thickness minimum.

-96" diameter riser sections shall be 9" thickness minimum.

-Base section shall be 18" minimum thickness with 12" minimum lip


4. Wet Well Bedding

Provide a minimum 18" crushed stone base beneath wet well.

ITEMS IN CONFLICT WITH THIS ADDENDUM ARE HEREBY DELETED.

THIS ADDENDUM IS TO BE ACKNOWLEDGED BY THE BIDDER ON THE BID FORM.

Pickering Firm, Inc.

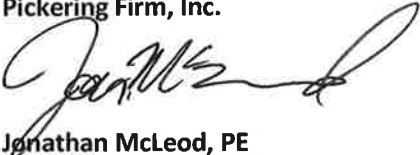

Jonathan McLeod, PE
24 May 2021



Project Sign 4'x8'

**AWG Infrastructure Improvements
City of Hernando, MS
CAP LOAN # XX-XXX**



**GOVERNOR TATE REEVES
STATE OF MISSISSIPPI
MISSISSIPPI DEVELOPMENT AUTHORITY
John Rounsaville, Executive Director**

N.C. Tom Ferguson, Mayor

**Natalie Lynch, Alderman-Ward 1
Andrew Miller, Alderman-Ward 2
Gary Higdon, Alderman-Ward 3
Mike McLendon, Alderman-Ward 4
Cathy Brooks, Alderman-Ward 5
Jeff Hobbs, Alderman-Ward 6
W.I. "Doc" Harris, Alderman At Large**

State Funds Provided by Mississippi State Legislature

North Delta PDD



**Pickering Firm Inc.,
Engineers**

, Contractor