

October 23, 2023

ADDENDUM NUMBER TWO (2)

Project: SCSD Raleigh Football Renovation – 2023 Rebid  
Smith County School District  
Raleigh, MS  
PN: 22050

FROM: Dean Architecture  
661 Sunnybrook Road, Suite 140  
Ridgeland, MS 39157  
(601) 939-7717

The following additions, changes, clarifications and/or substitutions to the Project Drawings as indicated, are hereby made a part of the Contract Documents. Acknowledge receipt of this Addendum by inserting its number and date in the Proposal Form where indicated.

General

**Item #1:** Finishing Schedule: For finishes in Visitor's Toilets #201, #202, Visitors Concessions #203, Visitor's Locker Room #204, Visitor's Players Toilets, provide the following:

Floors-sealed Concrete, base-none, Walls-CMU-painted, Ceilings-plywood painted.

Drawings

**Item #1:** Sheet A100, Renovation Note #5, add the following:

At each of the new concrete steps, provide four vertical rods that are drilled and set into the existing bleacher aisle to hold the new concrete step in place. Provide one #4 rod horizontally across the nose of each step.

**Item #2:** Sheet A100, Renovation Note #6, add the following:

The re-worked barrier railing shall have a finished height of 3'-6" above the elevation of the outer edge of the bleacher seats.


**Item #3:** Sheet A102, Visitors Concessions, Toilets, Locker Room Floor Plan, add the following:


In Visitors Concessions #203, provide for the addition and installation of a 30" square metal non-rated attic access panel into the existing plywood ceiling. Locate this access panel in the back portion of this room as close to the center line of the roof as the existing structures will allow and in front of the owner's equipment.

In the back portion of Concessions #203, add renovation note #13 to notes #4, #6, and #7 that are already identified to address this area.

END OF ADDENDUM NUMBER TWO (2)

Dean Architecture, P.A.

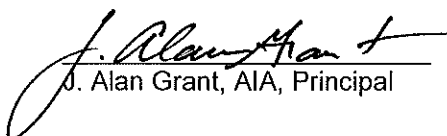  
J. Alan Grant, AIA, Principal

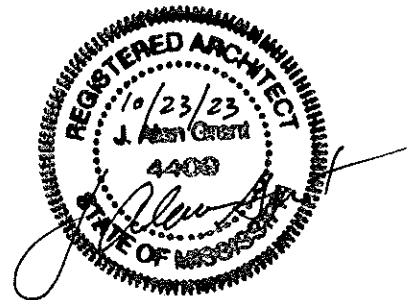

PLEASE ATTACH THIS ADDENDUM TO THE INSIDE FRONT COVER OF EACH SET OF SPECIFICATIONS.