

August 14, 2020

ADDENDUM NUMBER TWO (2)

Project: Construct ACFT Overhead Cover (PN: 28190207)  
Add/Alt to S271 Latrine (PN: 28200218)  
Camp McCain Training Center  
Grenada, MS  
PN: 19058 & 19080

FROM: Dean and Dean/Associates Architects, P.A.  
4400 Old Canton Road, Suite 200  
Jackson, MS 39211  
(601) 939-7717

The following additions, changes, clarifications and/or substitutions to the Project Drawings as indicated, are hereby made a part of the Contract Documents. Acknowledge receipt of this Addendum by inserting its number and date in the Proposal Form where indicated.

General:

**Item #1:** A local building permit is not required on this project.

**Item #2:** All construction testing required by specification section 033000 Cast-In-Place Concrete and section 312200 Grading shall be provided by a third party testing company with coordination and payment of those services provided by the contractor. Contractor to submit qualification of testing company to owner and architect for approval.

Architectural Specifications:  
Volume 2 – S271 Latrine

**Item #1:** Section 075400 – Thermoplastic Membrane Roofing, paragraph 2.03.A.3, change membrane color to white.

**Item #2:** Section 077100 – Roof Specialties, add subparagraph 2.2.B to read as follows:

B. Shop fabricated metal fascias may be submitted for consideration as substitute product. Contractor must provide certification of compliance for systems tested in accordance with ANSI/SRPI ES-1, RE-3. NO EXCEPTIONS.


Structural/Civil – Volume One - ACFT

SEE ATTACHED STRUCTURAL/CIVIL ITEMS PROVIDED BY SPENCER ENGINEERS, INC.

END OF ADDENDUM NUMBER TWO (2)

Dean and Dean/Associates  
architects p.a.

  
Kenneth A. Oubre, AIA, Principal

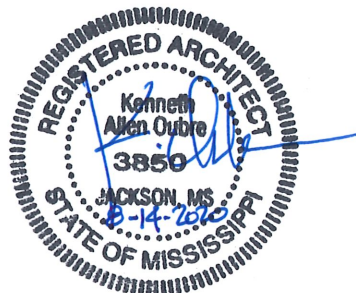

PLEASE ATTACH THIS ADDENDUM TO THE INSIDE FRONT COVER OF EACH SET OF SPECIFICATIONS.

Spencer-Engineers, Inc./Consultants



P.O. Box 4328  
Jackson, MS  
39296-4328  
(601) 982-7766  
Fax (601) 982-7769

August 14, 2020

Dean and Dean Associates Architects  
4400 Old Canton Road, Suite #200  
Jackson, MS 39211

Attention: Mr. Kenny Oubre

RE: ACFT, Camp McCain, MS  
Addendum #2  
SE# 19065

Dear Mr. Oubre,

See the attached sketch for the requirements for undercut and backfill below the building.


If you have any questions, please let me know.

Yours very truly,

SPENCER-ENGINEERS, INC.

A handwritten signature in blue ink that reads "Kenneth S. McGrath". The signature is written in a cursive style.

Kenneth S. McGrath, P.E.

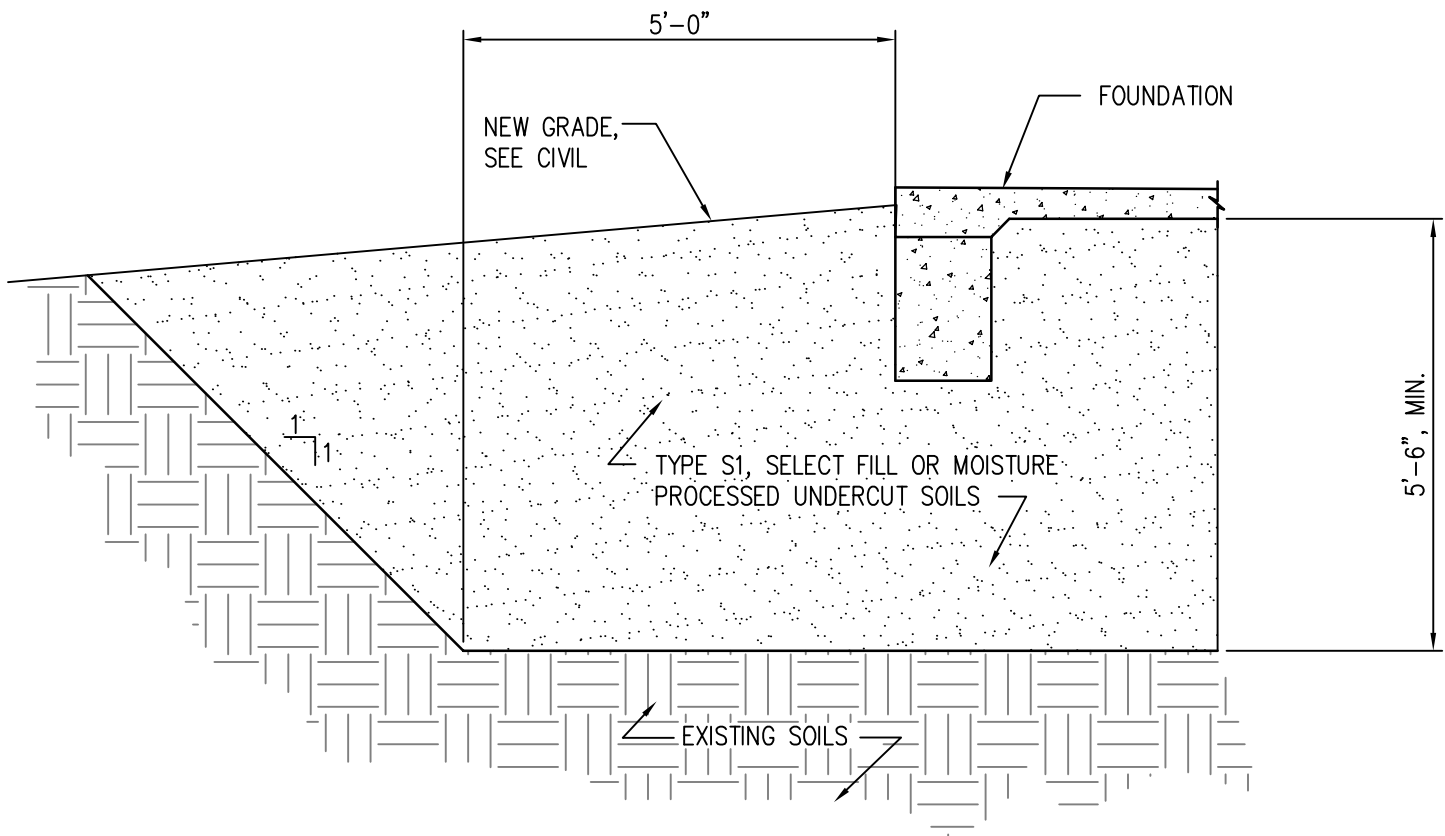

### OVEREXCAVATION AND BACKFILL DETAIL

**OVEREXCAVATION AND BACKFILL NOTES:**

1. THE CONTRACTOR SHALL OVEREXCAVATE AND BACKFILL UNDERNEATH THE BUILDING PER THE ABOVE DETAIL.
2. CONTRACTOR SHALL VERIFY THE EXISTING SOILS AT THE BOTTOM OF THE EXCAVATION ARE STIFF AND STABLE BEFORE BACKFILLING BEGINS.
3. UNDERCUT SOILS ARE SUITABLE TO USE AS STRUCTURAL FILL, BUT WILL REQUIRE MOISTURE CONDITIONING TO MEET THE REQUIREMENTS OF STRUCTURAL FILL. IF REQUIRED STRUCTURAL IMPORTED FILL MATERIAL IS NECESSARY, SEE SPECIFICATIONS FOR ALLOWABLE TYPE S1 FILL. INSTALL PER SPECIFICATIONS.
4. PROVIDE TESTING OF ALL EXISTING SOILS AND FILLED SOILS AS REQUIRED IN THE SPECIFICATIONS.

REF. SHEET:	S101
SHEET NO.:	S101-SUP-1
DATE:	14 AUG 2020